


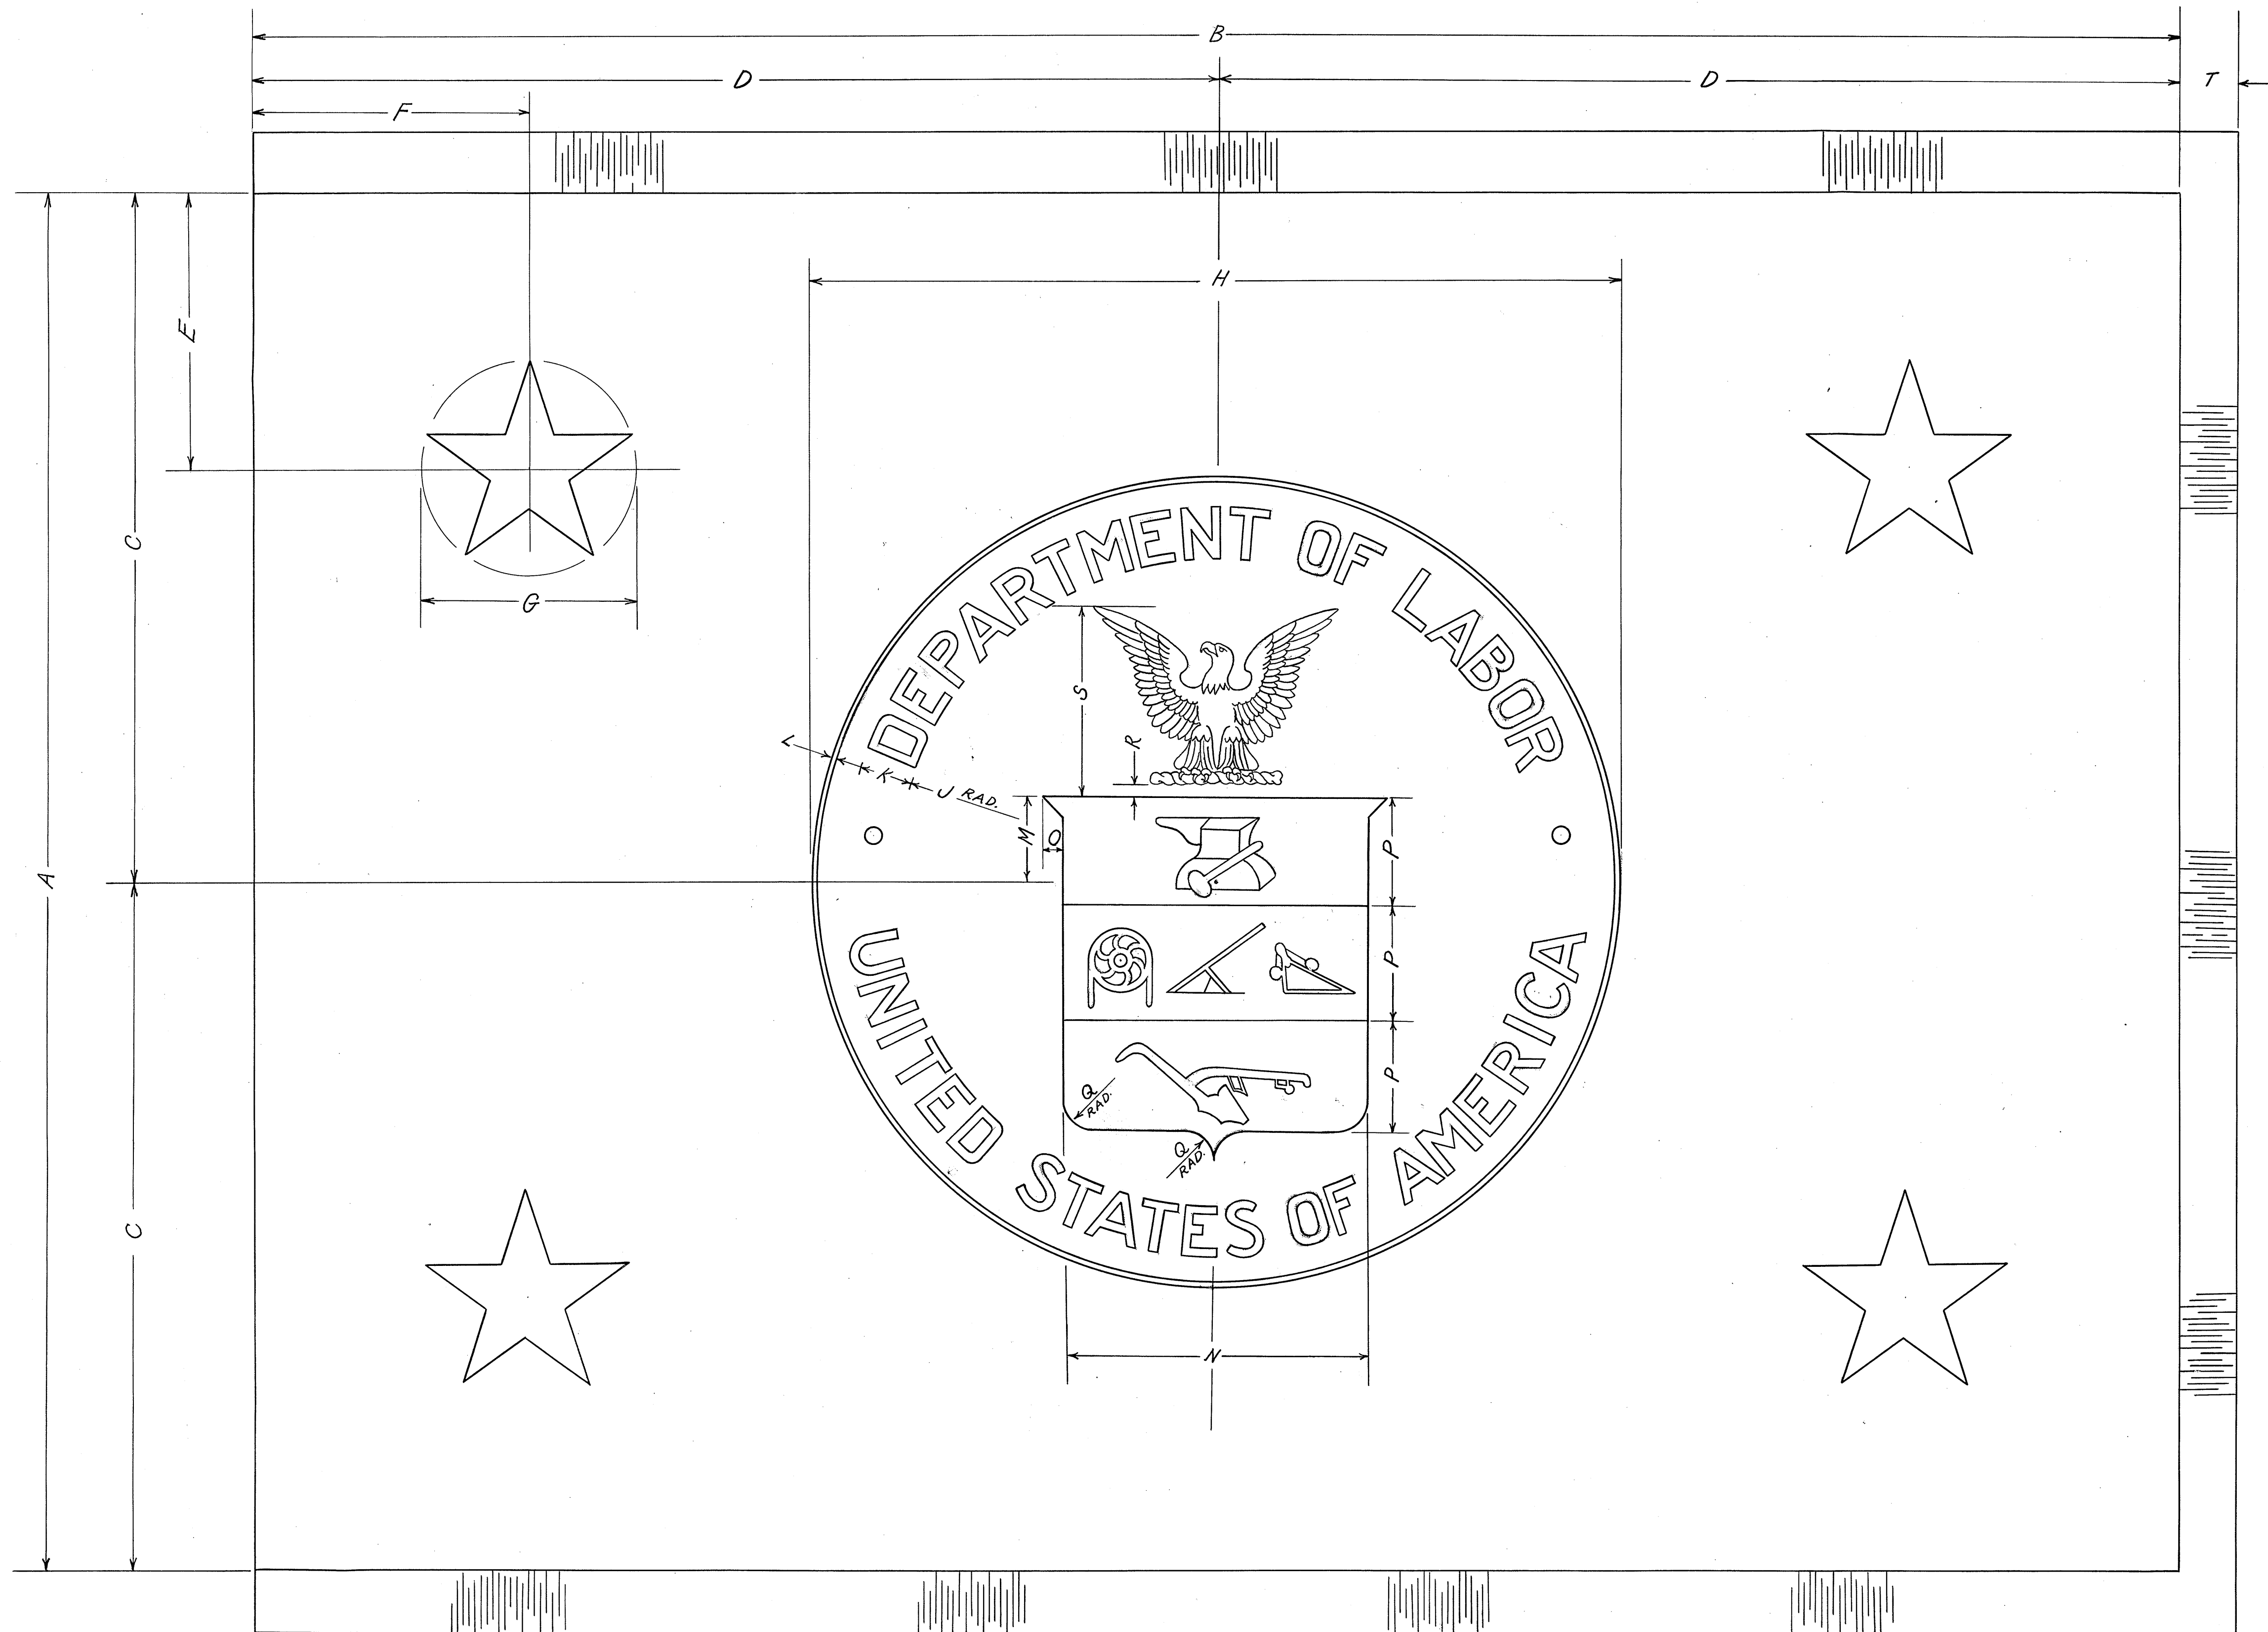

ALL DIMENSIONS ARE EXCLUSIVE OF HEADING AND HEMS.

SEAL AND STARS TO APPEAR ON BOTH SIDES OF FLAG.

BACKGROUND OF SEAL AND SHIELD TO BE APPLIQUED.

LETTERING WILL READ CORRECTLY ON BOTH SIDES OF FLAG.

ALL SINGLE NEEDLE STITCHING TO BE 16 STITCHES TO THE INCH.

ALLOW 3/16 INCH DOUBLE HEM ON TOP, BOTTOM AND FLY END OF FLAG.

FRINGE TO BE STITCHED TO FRONT OF FLAG BASE WITH MACHINE SEWING SILK "A" OF THE SAME COLOR AS THE FRINGE ON THE FRONT AND OF THE FLAG BASE ON THE BACK.

NO. OF LINE	KIND	MATERIAL						DIMENSIONS																		TYPE OF HEADING	
		FLAG BASE	STARS	BACKGROUND	SEAL SHIELD	DESIGN - LET.	FRINGE	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S		T
1	AUTOMOBILE FLAG	SILK	EMBROIDERY	SILK	SILK	EMBROIDERY	SILK	1'6"	2'2"	9"	1'1"	3 ⁹ / ₁₆ "	3 ⁹ / ₁₆ "	2 ⁷ / ₈ "	10 ¹ / ₂ "	4 ³ / ₄ "	1 ¹ / ₁₆ "	1 ¹ / ₁₆ "	1 ¹ / ₈ "	4"	1 ¹ / ₄ "	1 ¹ / ₁₆ "	3 ³ / ₈ "	1 ¹ / ₈ "	2 ³ / ₄ "	1 ¹ / ₂ "	5-1-45(h)
2	AIRCRAFT PLATE	ALUMINUM						11"	14"	5 ¹ / ₂ "	7"	2 ³ / ₁₆ "	2 ³ / ₁₆ "	1 ³ / ₄ "	6 ¹ / ₂ "	2 ⁹ / ₁₆ "	7 ¹ / ₁₆ "	1 ¹ / ₁₆ "	1 ¹ / ₁₆ "	2 ¹ / ₂ "	5 ³ / ₃₂ "	7 ¹ / ₈ "	7 ³ / ₃₂ "	1 ¹ / ₁₆ "	1 ¹ / ₂ "		
3	SPECIAL (NAVY)	NAVY BLUE BANNERS	EMBROIDERY	NAVY BLUE	NAVY BLUE	EMBROIDERY		4'0"	6'0"	2'0"	3'0"	1'0"	1'0"	1'0"	2'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	1'0"	
4																											

NAME	COLORS WITH COLOR CABLE NUMBERS									
	FLAG BASE	STARS	BACKGROUND	EDGE - LET.	EAGLE	WREATH	SEAL	SHIELD - LOWER	SHIELD - UPPER	FRINGE
SECRETARY OF LABOR	WHITE 65005	BLUE 70088	WHITE 65005	BLUE 70088	YELLOW 65002	YELLOW + RED 65002-70180	YELLOW 65002	RED 70180	BLACK OUTLINE 65018	BLUE 70088

REVISIONS

NO.	DATE	CHECKED	APPROVED	NO.	DATE	CHECKED	APPROVED
1	13 Sept 49	EW	AD				

DEPARTMENT OF THE ARMY
O. Q. M. G.

FLAGS
SECRETARY OF LABOR

SCALE

DATE 19 JULY 1949

DRAWN EK

CHECKED ELO.

EXAMINED

SUBMITTED

APPROVED FOR THE O. Q. M. G.
ARTHUR E. DUBOIS, CHIEF, HERALDIC BRANCH

SPECIFICATION NO.

DRAWING NO. 5-1-160